

**Test Report** No.SDHL250100060301FT Date: Mar 24, 2025 Page 1 of 8

FOSHAN OFIEXPERTS FURNITURE CO.,LTD 3RD FLOOR, BUILDING 2, NO. 16 YUANNAN 2ND ROAD, SHAZUI SECTION, JIUJIANG INDUSTRIAL PARK, NANHAI DISTRICT, FOSHAN, GUANGDONG, CHINA.

Sample Description : OFFICE CHAIR Item No. : EC01-M-AS(JOY)

Manufacturer : FOSHAN OFIEXPERTS FURNITURE CO.,LTD

As above test item and its relevant information regarding to the submission are provided and confirmed by the applicant. SGS is not liable to either the test item or its relevant information, in terms of the accuracy, suitability,

reliability or/and integrity accordingly.

: Jan 09, 2025 Sample Receiving Date Sample Resubmission Date : Mar 06, 2025

**Test Performing Date** : Jan 10, 2025 to Mar 24, 2025

**Test Performed** : Selected test(s) as requested by applicant

## **Test Result Summary**

No.	Test(s) Requested	Result(s)	Comments
1	ANSI/BIFMA X5.1-2017 (R2022)	PASS	/
For further details, please refer to the following page(s)			

Signed for and on behalf of SGS-CSTC Standards Technical Services Co., Ltd. Shunde Branch

Marco Leung

Authorized Signatory

Mars Leurg





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's sindings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction force were cising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: Ch.Doccheck@ags.com"

1-2/F., Building 1, European Industrial Park, No.1, Shunhe South Road, Wusha, Dalliang, Shunde District, Foshan, Guangdong, China 528300 t (86-757)22805888 www.sgsgroup.com.cn 中国·广东·佛山市顺德区大良街道办事处五沙社区居民委员会顺和南路1号欧洲工业园一号厂房首层、二层 邮编: 528300 t (86-757)22805888 sgs.china@sgs.com



No.SDHL250100060301FT

Page 2 of 8

### **TESTS AND RESULTS**

Date: Mar 24, 2025

### **Test Conducted:**

ANSI/BIFMA X5.1-2017 (R2022) General-Purpose Office Chairs.

### No. of Sample:

4 pieces. For more sample information and pictures, please refer to the following page.

Chair Type: 

☐ Type I. Tilting chair
☐ Type II. Fixed seat angle, tilting backrest
☐ Type III. Fixed seat angle, fixed backrest

Test and Requirements	Test Results	
5 Backrest Strength Test - Static - Type I and II		
Functional Load		
Force: 667 N (150 lbf.) for one minute.	PASS	
Acceptance level: There shall be no loss of serviceability to the chair.		
Proof Load		
Force: 1001 N (225 lbf.) for one minute.	PASS	
Acceptance level: There shall be no sudden and major change in the structural integrity	FASS	
of the chair. Loss of serviceability is acceptable.		
6 Backrest Strength Test - Static - Type III		
Functional Load		
Force: 667 N (150 lbf.) for one minute.	PASS	
Acceptance level: There shall be no loss of serviceability to the chair.		
Proof Load		
Force: 1001 N (225 lbf.) for one minute.	PASS	
Acceptance level: There shall be no sudden and major change in the structural integrity	FAGG	
of the chair. Loss of serviceability is acceptable.		
7 Drop Test – Dynamic		
Functional Load Test		
A test bag weighting 102 kg (225 lb.) shall be raised 152 mm (6 in.) above the		
uncompressed seat and released one time (For chairs with seat height adjustment	PASS	
features, tested both in highest and lowest position).		
Acceptance level: There shall be no loss of serviceability.		
Proof Load Test		
A test bag weighting 136 kg (300 lb.) shall be raised 152 mm (6 in.) above the		
uncompressed seat and released one time (For chairs with seat height adjustment	PASS	
features, tested both in highest and lowest position).	1 700	
Acceptance level: There shall be no sudden and major change in the structural integrity		
of the chair. Loss of serviceability is acceptable.		
8 Swivel Test – Cyclic		
Load on seat: 122 kg (270 lb.)		
Cycles: 120,000	PASS	
Rate: Between 5 and 15 rotations per minute.		
Acceptance level: There shall be no loss of serviceability.		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction force were reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN\_Doccheck(砂っg。com

1-2F, Bulding f, European Industrial Park, No.1, Shumhe South Road, Wusha, Daliang, Shunde District, Foshan, Guangdong, China 528300 t (86-757)22805888 www.sgsgroup.com.cn
中国・广东・傳山市順德区大良街道办事处五沙社区居民委员会顺和南路1号欧洲工业园一号厂房首届、二层 邮编: 528300 t (86-757)22805888 sgs.china@sgs.com



**Test Report** No.SDHL250100060301FT Date: Mar 24, 2025 Page 3 of 8

Test and Requirements	Test Results
9 Tilt Mechanism Test – Cyclic	
Load on seat: 109 kg (240 lbs.)	
Cycles: 300,000	PASS
Rate: Between 10 and 30 cycles per minute.	
Acceptance level: There shall be no loss of serviceability to the tilt mechanism.	
10 Seating Durability Tests – Cyclic	
10.3 Impact Test	
Drop weight: 57 kg (125 lb.)	
Drop height: 36 mm (1.4 in.) above the uncompressed surface on the seat	PASS
Cycles: 100,000	F A33
Rate: Between 10 and 30 cycles per minute.	
Acceptance level: There shall be no loss of serviceability to the chair.	
10.4 Front Corner Load-Ease Test – Cyclic – Off-center	
Force: 890 N (200 lbf.)	
Cycles: 40,000	PASS
Rate: Between 10 and 30 cycles per minute.	
Acceptance level: There shall be no loss of serviceability to the chair.	
11 Stability Tests	
11.3.1 Rear Stability Test for Type III Chairs	
Load the chair with 6 disks.	
• F = 0.1964 (1195 – H) Newton. H is the seat height in mm.	
• [F = 1.1 (47 – H) pounds force.]. H is the seat height in inches.	PASS
For chairs with seat height equal to or greater than 710 mm (28.0 in.), a fixed force of 93	
N (20.9 lbf.) shall be applied.	
Acceptance level: The chair shall not tip over.	
11.3.2 Rear Stability Test for Type I and II Chairs	
Load the chair with 13 disks.	PASS
Acceptance level: The chair shall not tip over.	
11.4 Front Stability	
Load 61 kg (135 lb.) on 60 mm (2.4 in.) from the front center edge and a horizontal	PASS
outward force of 20 N (4.5 lbf.) applied.	17.00
Acceptance level: The chair shall not tip over as the result of the force application.	
12 Arm Strength Test - Vertical – Static	
Functional Load	
Force: 750 N (169 lbf.) for one minute.	
Acceptance level: There shall be no loss of serviceability. For a height adjustable arm,	PASS
failure to hold its height adjustment position to within 6 mm (0.25 in.) from its original set	
position as the result of the loading is considered a loss of serviceability.	
Proof Load	
Force: 1125 N (253 lbf.) for 15 seconds.	
Acceptance level: There shall be no sudden and major change in the structural integrity	PASS
of the chair. For a height adjustable arm, a sudden drop in height of greater than 25 mm	
(1 in.) does not meet this requirement. Loss of serviceability is acceptable.	
13 Arm Strength Test - Horizontal - Static	
Functional Load	
Force: 445 N (100 lbf.) for one minute in the outward direction.	PASS
Acceptance level: A functional load applied once shall cause no loss of serviceability.	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction force were reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

Artention: 10 ceack the authenticity of testing /inspection reports certificate, please contact us at telephone: (86-753) 337 1445, or email: CN\_Doccheck@sgs.com

1-2/F, Building 1, European Industrial Park, No.1, Shunhe South Road, Wusha, Daliang, Shunde District, Foshan, Guangdong, China 528300 t (86-757) 22805888 www.sgsgroup.com.cn
中国・广东・佛山市順德区大良街道办事处五沙社区居民委员会顺和南路1号欧洲工业园一号厂房首层、二层 邮编: 528300 t (86-757) 22805888 sgs.china@sgs.com



**Test Report** No.SDHL250100060301FT Date: Mar 24, 2025 Page 4 of 8

Test and Requirements	Test Results
Proof Load	
Force: 667 N (150 lbf.) for 15 seconds in the outward direction.	PASS
Acceptance level: A proof load applied once shall cause no sudden and major change in	F A33
the structural integrity of the unit. Loss of serviceability is acceptable.	
14 Backrest Durability Test - Cyclic - Type I	
Weight on seat: 109 kg (240 lbs.)	
Load on backrest: 445 N (100 lbf.)	PASS
Cycles: 120,000	1700
Rate: Between 10 and 30 cycles per minute.	
Acceptance level: There shall be no loss of serviceability.	
15 Backrest Durability Test - Cyclic - Type II and III	
Weight on seat: 109 kg (240 lbs.)	
Load on backrest: 334 N (75 lbf.)	PASS
Cycles: 120,000	17100
Rate: Between 10 and 30 cycles per minute.	
Acceptance level: There shall be no loss of serviceability.	
16 Caster/Chair Base Durability Test - Cyclic	
16.1 Caster/Chair Base Durability Test for Pedestal Base Chairs	
Load on chair: 122 kg (270 lb.)	
Stroke: 762±50 mm (30±2 in.) of travel	
Cycles: 2,000 cycles over the obstacles and then 98,000 cycles without obstacles.	PASS
Rate: 10 ± 2 cycles per minute	
Acceptance level: There shall be no loss of serviceability. No part of the caster shall	
separate from the chair as a result of the application of the 22 N (5 lbf.) force.	
16.2 Caster/Chair Frame Durability Test for Non-pedestal Chairs with Casters	
Load on chair: 122 kg (270 lb.)	
Stroke: 762±50 mm (30±2 in.) of travel	N1/A
Cycles: 2,000 cycles over the obstacles and then 98,000 cycles without obstacles.	N/A
Rate: 10 ± 2 cycles per minute	
Acceptance level: There shall be no loss of serviceability. No part of the caster shall	
separate from the chair as a result of the application of the 22 N (5 lbf.) force.	
17 Leg Strength Test - Front and Side Application 17.3 Front Load Test	
Functional Load Test	N1/A
Force: 334 N (75 lbf.) for one minute.	N/A
Acceptance level: Functional load(s) shall cause no loss of serviceability.	
Proof Load Test	
Force: 503 N (113 lbf.) for one minute.	N/A
Acceptance level: Proof load(s) shall cause no sudden and major change in the structural integrity of the chair. Loss of serviceability is acceptable.	
17.4 Side Load Test	
Functional Load Test	N/A
Force: 334 N (75 lbf.) for one minute.	IN/A
Acceptance level: Functional load(s) shall cause no loss of serviceability.  Proof Load Test	
Force: 503 N (113 lbf.) for one minute.	N/A
Acceptance level: Proof load(s) shall cause no sudden and major change in the	
structural integrity of the chair. Loss of serviceability is acceptable.	
18 Footrest Static Load Test - Vertical	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction force were reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

or email: <u>CN.Doccheck@sgs.com</u> 1-2/F., Building 1, European Industrial Park, No.1, Shunhe South Road, Wusha, Dallang, Shunde District, Foshan, Guangdong, China 528300 t (86–757)22805888 www.sgsgroup.com.cn 中国・广东・佛山市原徳区大良街道办事处五沙社区居民委员会順和南路1号欧洲工业园一号厂房首层、二层 邮编: 528300 t (86–757)22805888 sgs.china@sgs.com



**Test Report** No.SDHL250100060301FT Date: Mar 24, 2025 Page 5 of 8

Test and Requirements	Test Results
Functional load test	
F <sub>1</sub> : 445 N (100 lbf.) / 890 N (200 lbf.)	
F <sub>2</sub> : 445 N (100 lbf.)	N/A
Time: One minute	IN/A
Acceptance level: There shall be no loss of serviceability or sudden loss of footrest	
height.	
Proof load test	
Load: 1334 N (300 lbf.) for one minute	N/A
Acceptance level: The load applied once shall cause no sudden and major change in the	IN/A
structural integrity of the unit. Loss of serviceability is acceptable.	
19 Footrest Durability Test - Vertical – Cyclic	
Force: 890 N (200 lbf.)	
Cycles: 50,000	
Rate: Between 10 and 30 cycles per minute.	N/A
Acceptance level: There shall be no loss of serviceability. Adjustable footrests that move	
more than 25 mm (1 in.) in the first 500 cycles shall be considered to have lost their	
serviceability.	
20 Arm Durability Test – Cyclic	
Force: 400 N (90 lbf.) to each arm initially at a 10 degrees ± 1 degree angle	
simultaneously	PASS
Cycles: 60,000	1 700
Rate: Between 10 and 30 cycles per minute.	
Acceptance level: There shall be no loss of serviceability to the chair.	
21 Out Stop Tests for Chairs with Manually Adjustable Seat Depth	
Mass on seat: 74 kg (163 lb.)	
Downward weight: 25 kg (55 lb.)	N/A
Cycles: 25	
Acceptance level: There shall be no loss of serviceability to the unit.	
22 Tablet Arm Chair Static Load Test	
Load: 68 kg (150 lb.) for one minute	
Acceptance level: The load applied once shall cause no sudden and major change in the	N/A
structural integrity of the chair. After performing the test, the tablet arm must allow	
egress from the unit; other losses of serviceability are acceptable.	
23 Tablet Arm Chair Load Ease Test – Cyclic	
Load: 25 kg (55 lb.)	24/2
Cycles: 100,000	N/A
Rate: 14 ± 6 cycles per minute.	
Acceptance level: There shall be no loss of serviceability to the unit.	
24 Structural Durability Test – Cyclic	
Weight on seat: 109 kg (240 lb.)	
Horizontal force: 334 N (75 lbf.)	N/A
Cycles: 25,000	
Rate: Between 10 and 30 cycles per minute.	
Acceptance level: There shall be no loss of serviceability.	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction force were reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

or email: <u>CN.Doccheck@sgs.com</u>
1-2F, Building 1, European Industrial Park, No.1, Shunhe South Road, Wusha, Daliang, Shunde District, Foshan, Guangdong, China 528300 t (86–757)22805888 www.sgsgroup.com.cn
中国・广东・佛山市原徳区大良街道办事处五沙社区居民委员会顺和南路1号欧洲工业园一号厂房首层、二层 邮编: 528300 t (86–757)22805888 sgs.china@sgs.com



No.SDHL250100060301FT

Date:	Mar	24,	2025	
-------	-----	-----	------	--

Page 6 of 8

Test and Requirements	Test Results
Appendix C Base Test – Static  A force of 11,120 N (2500 lbf.) shall be applied for one minute. Remove the force. Apply a second force of 11,120 N (2500 lbf.) for one minute.  Acceptance level: There shall be no sudden and major change in the structural integrity of the base. The center column may not touch the test platform during the load applications.	PASS

### Remark:

- N/A Not applicable; N/R Not requested; N/P Not provided;
- For the sample information and pictures, please refer to the following page.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction force were reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

1-2|F., Building I, European Industrial Park, No. 1, Shunhe South Road, Wusha, Dallang, Shunde District, Foshan, Guangdong, China 528300 t (86-757)22805888 www.sgsgroup.com.cn 中国·广东·佛山市順德区大良街道办事处五沙社区居民委员会顺和南路1号欧洲工业园一号厂房首层、二层 邮编: 528300 t (86-757)22805888 sgs.china@sgs.com



No.SDHL250100060301FT

Date: Mar 24, 2025

Page 7 of 8

### **SAMPLE INFORMATION AND PICTURES**

Weight: 23.3 kg

Overall Dimensions: 740 mm W x 730 mm D x (1130~1355) mm H

Other Dimensions: Base radius, 355 mm.

## **Sample as Received**











Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction force were reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com




No.SDHL250100060301FT

Date: Mar 24, 2025

## Page 8 of 8

### **Test Pictures with Details**

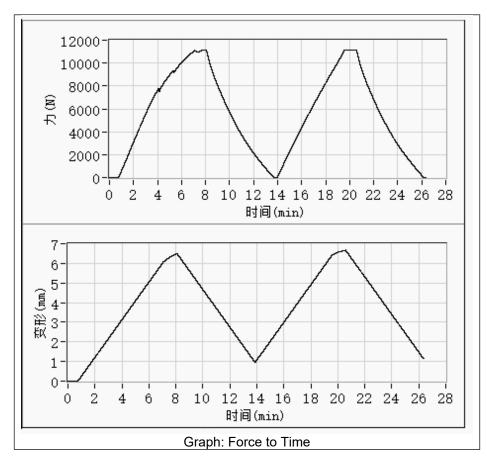

Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule (w=0) stated in ILAC-G8:09/2019.

\*\*\*End of Report\*\*\*



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction force were reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com